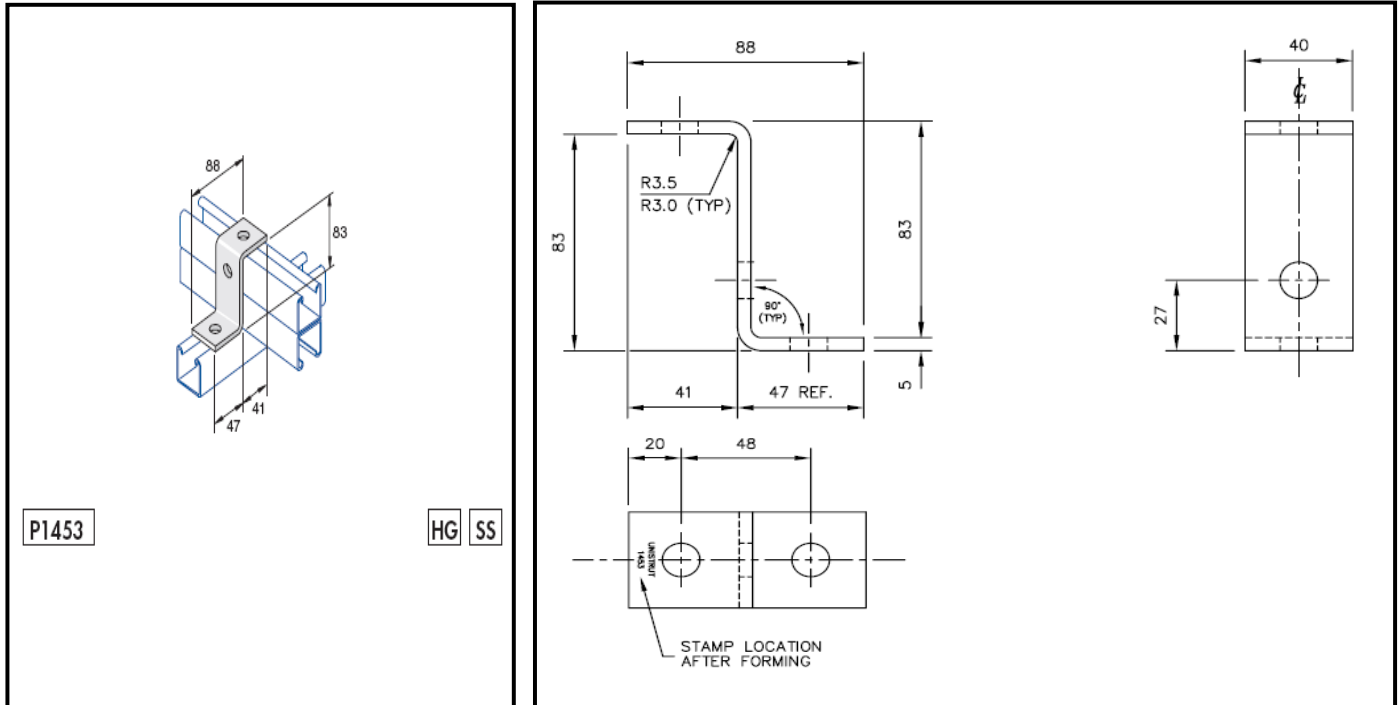


P1453 - 3 HOLE Z SUPPORT BRACKET

**Material:**

Mild Steel to BS EN 10149-2-S315MC or Q345
Stainless Steel to BS EN 10088-2-1.4404+1D (S316)

Fixings:-

All 14mm diameter holes use M12 grade 8.8 hex head screws with M12 BSEN 10025 S275 or Q235 Channel Nuts.

Finishes:

Hot Dip Galvanized - Process in accordance with BS EN ISO 1461 to a mean coating thickness (minimum) of 55µm.
Stainless Steel - Self Colour.

Application:

Drawing illustrates only one application for the fitting. In most cases many other applications are possible.
The channels shown in the application are P1000 and P1001 - 41mm square and 82 X 41.
Loading data varies due to specific application, for all queries contact Unistrut UK.

Part Weight:- 0.32 Kg.

Box Weight: 3.2 Kg.

No. Per Box; 10

UNISTRUT HEALTH & SAFETY DATA SHEET REF'S :

No. 001 - PLAIN STEEL, PRE-GALVANIZED, GALVANIZED AND STAINLESS STEEL COMPONENTS
No. 099 - HOT DIP GALVANIZING (CHANNEL & COMPONENTS)
No. 102 - STEEL



BS EN ISO 9001
Cert. FM825